
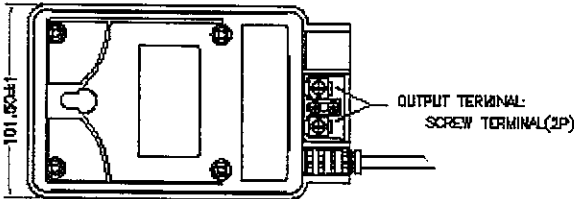
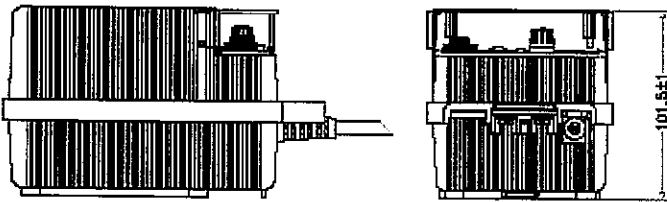
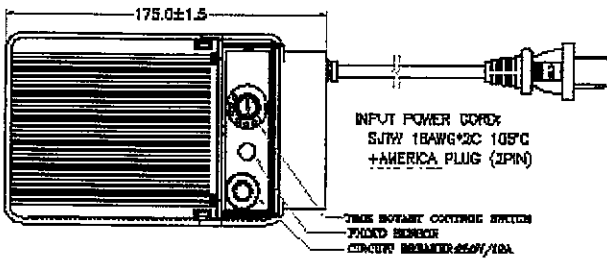


ELECTRICAL & MECHANICAL SPECIFICATION

UL
LISTED
E181950

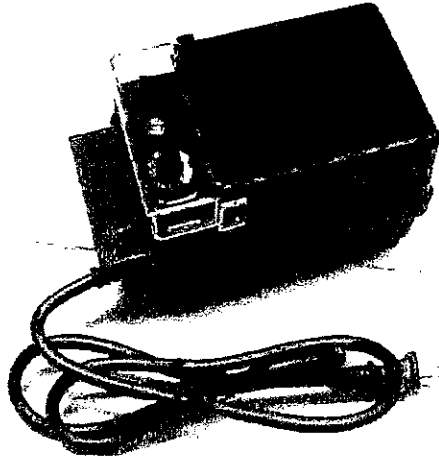

ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	180	W
Exciting Current With No load	150	mA Max
Exciting Current With Full load	1500	mA Max
Output Voltage	12.0	Volts ±5%
Output Current	12.5	Amp
Output Voltage Without Load	13.3	Volts ±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Efficiency	70	%
Insulation Class	B (130)	°C

PHOTO CELL & TIMER CONTROL

OFF:	Photo cell Control "Off".
ON:	Photo cell Control "On",
AUTO:	Photo cell Control "On".
4H. 6H. 8H:	Photo cell Control "On", Will "Off" Output Power Full Time.

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	175.0*101.5*101. mm
Weight	3200 g
Environment:	
Operating Temperature	-10 To 40 °C
Storage Temperature	-20 To 70 °C
Relative Humperure	40°C±2°C
RELATIVE HUMIDITY	90% RH

Input Cable: **SJTW 18AWG/2C 105 °C**
1.8M LENGTH+AMERICA PLUG(2PIN)

Output Cable: **SCREW TERMINAL (2P)**

ELECTRICAL CIRCUIT

