


## 2. CONNECTING YOUR GARDEN LIGHTS

### Step 1

Remove the lock ring by twisting anti-clockwise to the stops, and pull off, which exposes the inside of the connector.

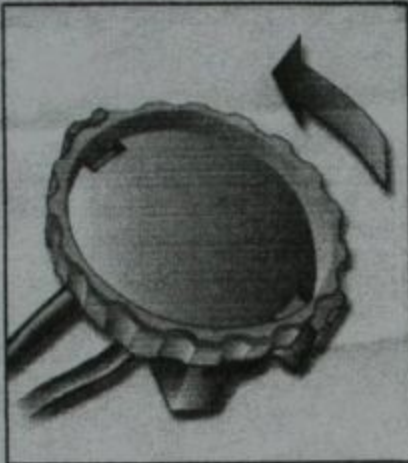


### Step 2

Lay the cable FLAT in the slot on the fixed part of the connector, taking care to remove any twists and ensuring the cable is located over the metal spikes. Push down firmly so that the spikes securely dig into the cable insulation.



### Step 3

Locate the tabs on the lock ring over the slots on the fixed half and push down until they lock, taking care to keep the cable FLAT.

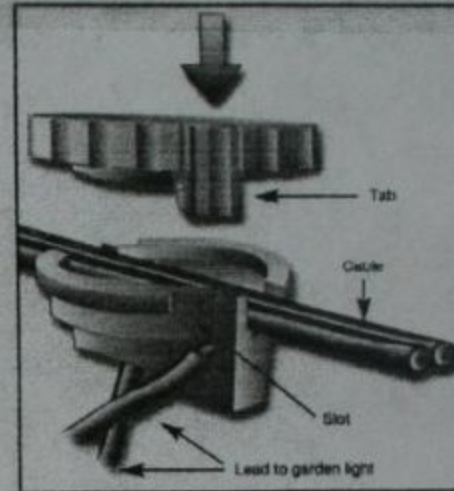

### Step 4

Push the two halves together FIRMLY and twist clockwise until the tabs hit the stops.

Repeat these steps for each light.

Connect the cable to the transformer terminals by stripping a small amount of insulation from each strand (approx. 10mm), and ensuring the stripped ends are secured firmly in the screw terminals on the transformer. Plug the transformer into the mains outlet and observe that all lights operate.

Check each light connection is secure by gently wiggling the cable and connector. This is perfectly safe - the voltage at this point is very low.

If the light flickers, the connection is not firm enough and should be re-connected.